

ZWITCHI-L2NN
No Neutral Smart Switch

QUICK GUIDE

This manual applies to Zigbee Smart Wireless Switches. This manual is for reference only.

We advise for installation to be performed by professionals. Please see our website for most detailed instructions. www.sensbi.com

Warning


1. Make sure you have completely cut off the power supply to the wall switch you are working on.
2. Do not install the wall switch with wet hands or when standing on wet surfaces.
3. Do not use beyond maximum load specified on the product.

Installation

As shown in the wiring diagram, insert wires into the corresponding terminal holes and screw them in. Then, take down the panel, use two screws to fix the switch into the wall box and cover the panel.

Diagram: For No Neutral Zigbee Switches

If the lamp flashes or glows when the switch is turned off, this indicates that the lamp is not suitable for use with this switch.

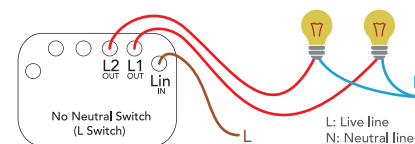


The wiring diagrams in this manual are for reference only. For different models, the terminal positions may not be the same, follow the labels on the product to connect the wires. The colors of the lines in the diagram are used only for demonstration and do not represent actual colors.

Add device to your app

1. Download the Sensbi app, register if necessary, and login to your account.

Sensbi app is available for both iOS and Android OS. Search the name 'SENSBI' in App Store or Google Play Store.

Sensbi app controls all of your smart products!



2. Important note before getting started:

All Zigbee switches require an operating Zigbee gateway.

3. Power up the wall switch, then press and hold the control button (for about 5-10 seconds) until the wireless LED blinks and enters pairing mode.

4. Open the Sensbi app > home page, tap the "+" icon in the top right corner of the screen > add device> under add manually section > select Electrical > Switch (Zigbee) > Follow Instructions on the screen to successfully complete the setup. For Zigbee switches, you can also enter the Zigbee gateway interface first and select "Add sub-device" to add the device.

5. Smart operation of the device: Inside the app, click "Smart" at the bottom of your screen, then select the "Tap-to-Run" or "Automation" options, follow instructions on screen to access smart settings for the device.

Connect with Third-Party voice control services

In your app, under your profile, you will find a selection of Third-Party Voice Services that you can connect your device to. Follow in app instructions.

Qualified Certification

Model:

Surveyor:

Date:



Warranty card

Name:

Contact:

Issue: